


SOFT-SHIELD® 1000

Knitted Wire Over Foam Core EMI Shielding Gaskets

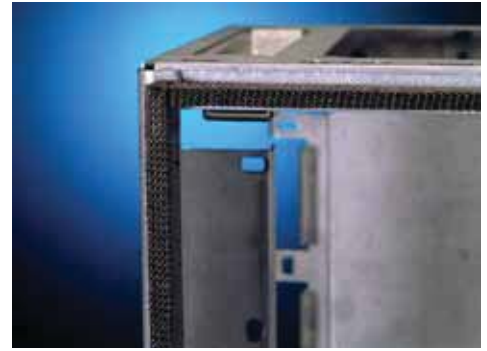


Customer Value Proposition:

High durability, exceptionally soft easy-to-install SOFT-SHIELD® 1000 gaskets are specially designed for EMI shielding commercial electronic enclosures with low closure force requirements, where weather sealing is not a requirement. They are constructed with a distinctive combination of fine knitted wire mesh over a soft urethane foam core. Standard wire types are Monel* or Ferrex**. Standard construction is 0.0035 inch (0.09 mm) diameter wire with a density of 10-15 knit courses per inch of length (CPI).

* Monel is a nickel-copper alloy per QQ-N-201.

** Ferrex® is Parker Chomerics tin-plated, copper-clad steel wire per ASTM B-520. ASTM (QQ-W-343) tin plate, 2-3% by weight; ASTM B-227 copper cladding, 30-40% by weight; SAE 1010 steel wire, balance by weight.

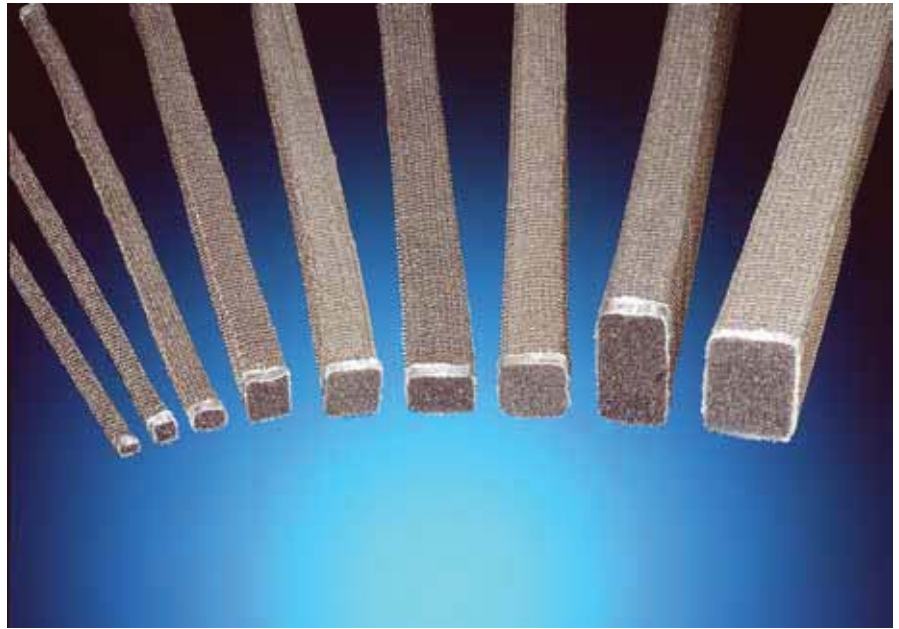

Contact Information:

Parker Hannifin Corporation
Chomerics Division
 77 Dragon Court
 Woburn, MA 01801

phone 781 935 4850
 fax 781 933 4318
 chomailbox@parker.com

www.chomerics.com
 www.parker.com/chomerics

Configurations:

SOFT-SHIELD 1000 gaskets are available in seven standard rectangular cross sections. Gaskets are supplied on spools, or cut to specified lengths. Parker Chomerics "Quick-Cut" technology allows this knitted wire gasket to be cut-to-length while bonding the wire to the foam core. This prevents fraying of the wire ends thereby eliminating FOD concerns, while maintaining the gasket's extremely low closure force characteristics. For attachment to flanges or mounting surfaces, these gaskets are available with an acrylic pressure-sensitive adhesive (PSA) option for quick, efficient application. Gaskets can also be produced as 4-corner spliced picture frames.

Product Features:

- ~70 dB attenuation from 20 MHz to 10 GHz.
- ~ 0.35 lb/inch (0.062 N/mm) closure force
- 10-15% compression set at 25% deflection
- UL 94HF-1 flammability rated
- 2.5 - 4.5 lb/inch (0.44 - 0.79 N/mm) PSA peel strength
- Maintains performance after 10,000 compression cycles
- Only 0.93% moisture absorption
- Broad compression range of 35% ± 20%.
- Continuous lengths on reels or cut-to-length and terminated
- Operating temperature of -40° F to 158° F (-40° C to 70° C)

SOFT-SHIELD® 1000 - Available Profiles

Contact Parker Chomerics for any other special requirements and an updated profile list.

ORDERING INFORMATION

Use the following part numbers to order

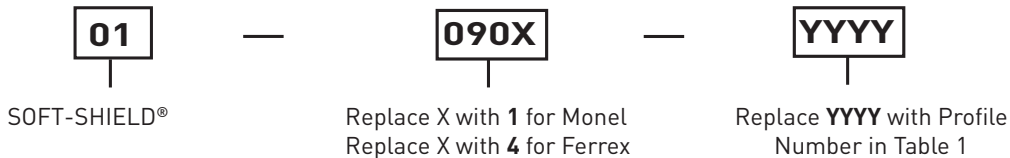


Table 1 - Profiles inches (mm)

Height	Width	Profile	Shape	PSA
0.125 (3.18)	0.187 (4.75)	6544	Rect.	Yes
		6601		No
0.125 (3.18)	0.250 (6.35)	6572	Rect.	Yes
		6602		No
0.250 (6.35)	0.250 (6.35)	6574	Square	Yes
		6603		No
0.375 (9.53)	0.375 (9.53)	6573	Square	Yes
		6604		No
0.375 (9.53)	0.500 (12.70)	6548	Rect.	Yes
		6604		No
0.250 (6.35)	0.375 (9.53)	6547	Rect.	Yes
		6606		No
0.500 (12.70)	0.500 (12.70)	6600	Square	Yes
		6607		No

Table 2 - Tolerances

Cross Section inches (mm)
Up to 1.000" ± 0.031 (25.40 ± 0.81)
Over 1.000" ± 0.062 (25.40 ± 1.52)
Cut-To-Length inches (mm)
Up to 0.375" Profile
up to 5.000' ± 0.030 (127 ± 0.76)
5.001'-10.000' ± 0.060 (127-254 ± 1.52)
over 10.000' add ± 0.060 (254 ± 1.52) for every 10"
Over 0.375" Profile
up to 25.000' ± 0.125 (635 ± 3.18)
over 25.000' ± 0.5% (635 ± 12.7) of overall length

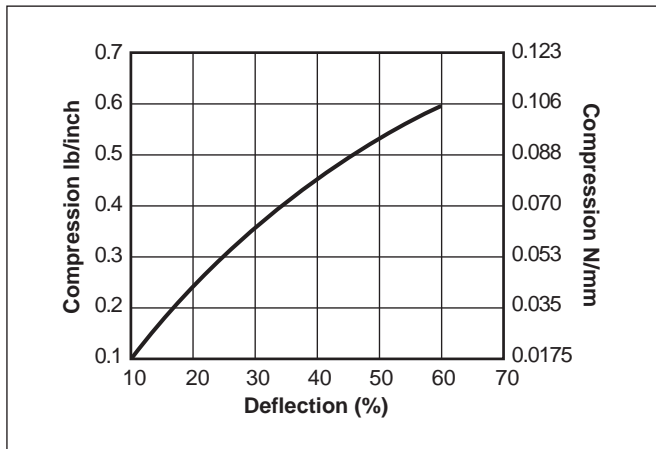


Figure 1 Typical Compression-Deflection

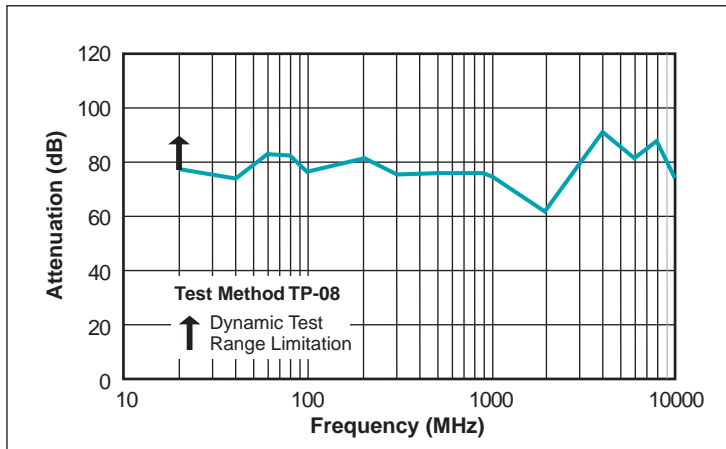


Figure 2 Typical Shielding Effectiveness

www.chomerics.com
www.parker.com/chomerics

CHOMERICS and SOFT-SHIELD are registered trademarks of Parker Hannifin Corporation. © 2012



ENGINEERING YOUR SUCCESS.